

DS-MH2311(C) Body Camera



- 2K recording.
- Max. 40 M (8832 × 4960) resolution of the captured picture.
- Transmits videos to central video platform via 4G wireless communication.
- GPS positioning module, uploading the location information to the center in real time.
- IR function to recognize the facial features in the captured picture even in dim environment.
- Waterproof, dustproof, and anti-fall with 1.8 m fall protection height, applicable to all-day field work.
- 3G/4G/Wi-Fi network connection with flexible wireless transmission.

▪ Specification


Camera	
Image Sensor	1/3" progressive scan CMOS
Max. Recording Resolution	2688 × 1512
Min. Illumination	Color: 0.15 Lux @ (F2.0, AGC ON), 0 Lux with supplement light
Day & Night	Switch IR cut filter automatically
Zoom	4 × digital
White Light	Supported
Lens	
Focal Length	2.4 mm fixed lens
FOV	Horizontal FOV: 134°, vertical FOV: 75°, diagonal FOV: 154°
Aperture	F2.0
Event	
Face Capture	Supported
Video	
Video Compression	H.264, H.265
Video Format	MP4, PS
Main Stream	60 Hz: 30 fps (2688 × 1512, 1920 × 1080, 1280 × 720, 720 × 576)
Sub-Stream	30 fps (1920 × 1080, 1280 × 720, 720 × 576)
Pre-record & Post-record	Pre-record: 60/10/5/3 s, Post-record: 60/10/5/3 s
Audio	
Audio Compression for Video Recording	AAC, G722
Audio Compression for Audio Recording	PCM
Audio Compression for Group Intercom	G711.A, G711.U, G722
Audio Bit Rate	G722 (16 kbps), AAC (dynamic), PCM (256 kbps), G711.A (64 kbps), G711.U (64 kbps)
Image	
Image Format	JPEG
Screen	
Display Resolution	320 × 240
Screen Size	2.4"
Touchscreen	Supported
Storage	
RAM	2 GB
ROM	32 GB by default, 64/128/256 GB optional
IR	
IR Range	Up to 10 m
IR Wavelength	850 nm
Wireless Network	
Bluetooth	BT4.2
Wi-Fi Protocol	802.11 a/b/g/n/ac
Wi-Fi Frequency Band	2.412 to 2.472 GHz, 5.15 to 5.25 GHz, 5.725 to 5.875 GHz

Cellular Network	Only available for models with /GLE: GSM: 850/900/1800/1900 WCDMA: B1/B8 FDD-LTE: B1/B2/B3/B4/B5/B7/B8/B20/B28 TDD-LTE: B38/B39/B40/B41
Positioning Mode	GPS
Network	
Protocol	HTTPS, RTSP, NTP, FTP
API	ISAPI, SDK, ISUP
Interface	
Indicator	2 indicator(s) for charging/working/recording/exception
Button	Power, Video recording, SOS, PTT, Picture capture, Audio recording
SIM Card	SIM card slot (fit for Nano-SIM card)
Charging Interface	Mini USB, Pogo Pin
USB	1 USB 2.0 port(s)
Laser Positioning	Supported
General	
Operating Condition	-20 °C to 55 °C (-4 °F to 131 °F). Humidity 95% or less (non-condensing)
Power	5 VDC, 2.0 A, max. 10 W
Dimensions	95 mm × 60 mm × 31.5 mm (3.7" × 2.4" × 1.2")
Weight	190 g (without mounting) (0.4 lb.)
Operating System	Android 9.0
Client	Hik-Connect, HikCentral Pro, HikCentral Master
MIC	Supported
Speaker	1 built-in speaker(s), max. power consumption: 1 W, max. sound pressure level: 92 dB (10 cm)
Battery	
Battery Type	Lithium-ion battery, dismountable
Capacity	3300 mAh
Charging Time	≤ 4 h
Battery Duration	Up to 12 h in 720p resolution ¹
Approval	
RF	EN 300 328 V2.1.1 (BT or 2.4G), EN 62311:2008 (BT or 2.4G), EN 55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN 50130-4:2011+A1:2014)
EMC	CE-EMC: EN 55032: 2015, EN 61000-3-2: 2019, EN 61000-3-3: 2013, EN 50130-4: 2011 +A1: 2014
Safety	CB: IEC 62368-1: 2014+A11, IEC 62368-1: 2018, CE-LVD: EN 62368-1: 2014/A11: 2017, EN IEC 62368-1:2020+A11:2020, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013, MIL STD 810G (2008)

1: This is a basic estimation of battery working life only when recording is on. Additional power consumption should be considered when IR, GPS, and/or network connection is on.

▪ **Available Model**
DS-MH2311/32G/GLE(C)

▪ Dimension

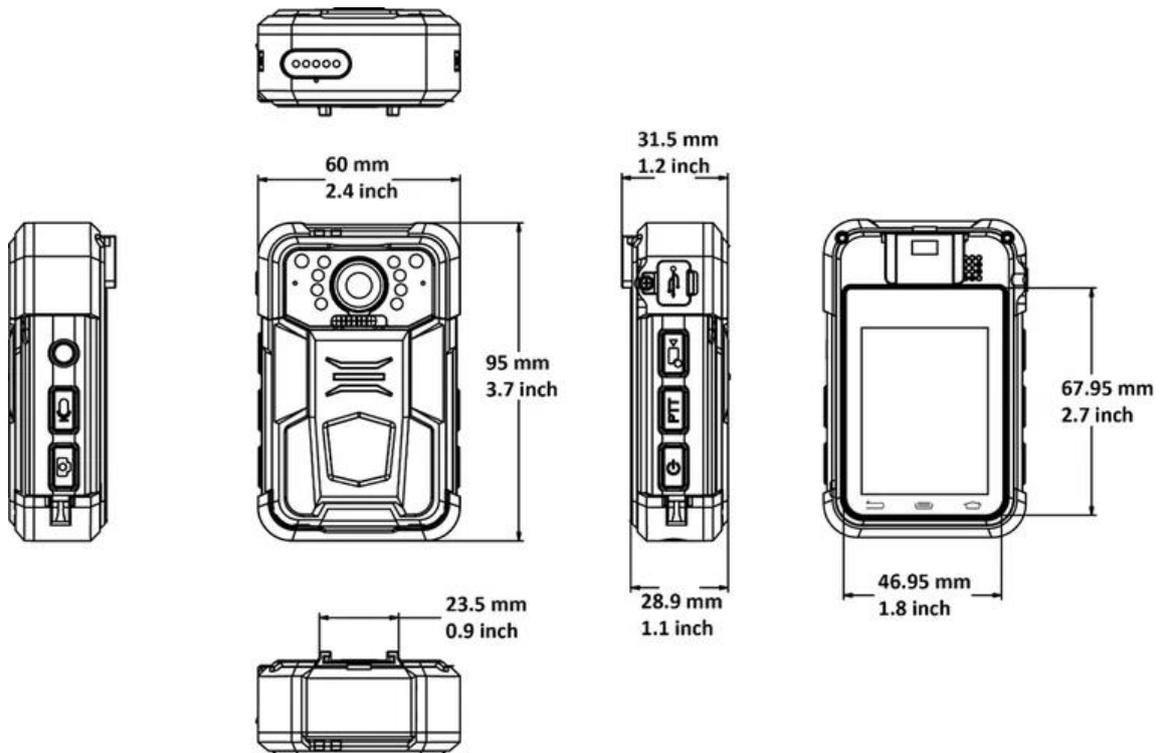

▪ **Accessory**

▪ **Included**



▪ **Optional**

<p>DS-MH1721 Oblique Shoulder Harness</p>	<p>DS-MH1412-N1 6 Ports Body Camera Charge Cradle</p>	<p>DS-MH1712 Clip of Body Camera</p>	<p>DS-MH1717 Body Camera-Magnetic Clip</p>	<p>DS-MH1716 Body Camera-Alligator Clip</p>
<p>DS-MH1715 Body Camera-Wearable Clip</p>				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

